

RP60HL Repeater



Description

The RP60HL is a display device for remotely repeating the reading on the main weight indicator or any other digital information.

This repeater may be controlled by a number of weighing indicators or third party devices (PC, PLC for example).

It has a high-luminosity red LED display 60 mm in 8 made up of 6 digits + sign.

It is fitted with a brightness sensor which allows the display power to be adapted according to surrounding lighting conditions. Repeater optimised for exposure to full sunlight.

Two fixing methods are available:

- Wall fixing
- Post fixing

ABS case specially designed to withstand rain, snow, hail and frost


Wall fixing kit supplied as standard (2 M6 screws not provided) or post fixing kit (dia. 90mm) (optionally available).

GENERAL CHARACTERISTICS

Sealing rating	IP 65
Power supply	230 VAc/ 50 Hz - Standard cable length 1.5 m
Power consumption	10 Watts
Operating temperature	-20 / +70°C
Packaging (L x W x D)	400 x 145 x 52 mm
Packaging (L x W x D)	490 x 230 x 125 mm
Weight of package	1.9 kg
Weight of repeater	1.5 kg

Serial link RS485 (2 wires)

Delivered with RS485 connection cable, length 5m (cable diameter: 5 mm).

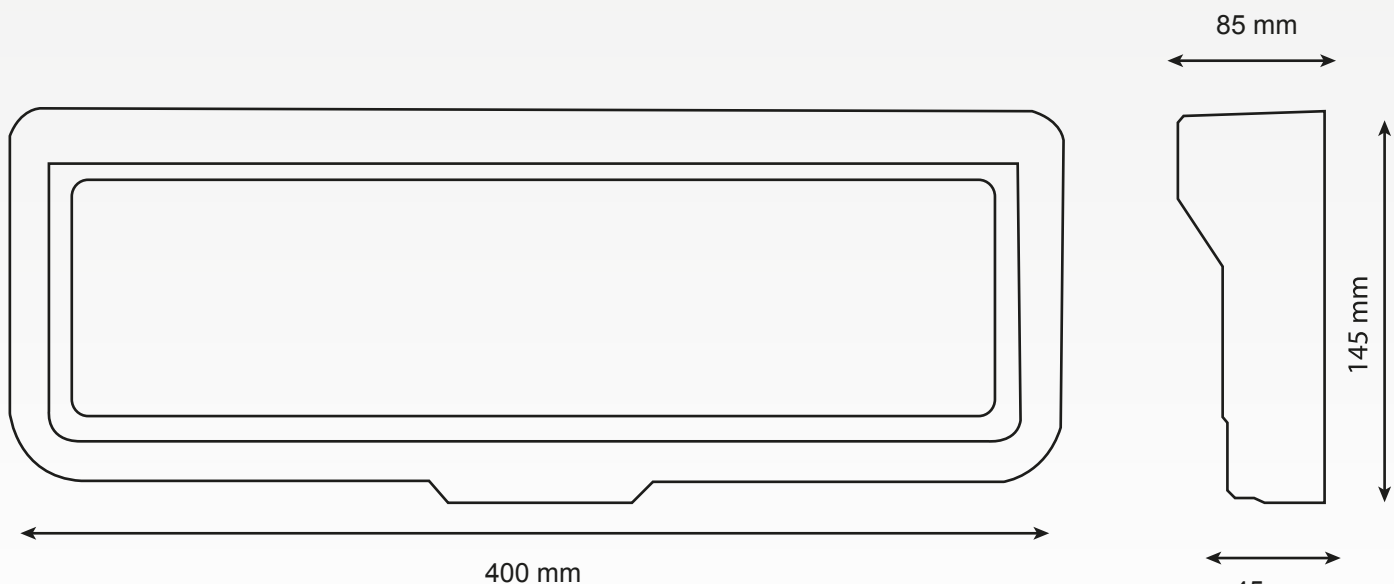

Dimensions in mm

Options

- ▶ Kit for fixing to round post dia. 90mm with junction box
- ▶ Post* in blue painted steel (RAL 5009) diameter 90 mm
Height 2 m or 3 m
Available in LV (Light Vehicle) or HV (Heavy Vehicle) versions



*Post fixing kit sold separately

ARPEGE MASTERK

Bâtiment n°6 - 15, rue du Dauphiné
CS 40216 - 69808 St PRIEST - FRANCE
Tél : +33 (0)4 72 22 92 22
Fax : +33 (0)4 72 22 93 45
marketing@masterk.com

Company Registration: 971 506 480 RCS LYON
SIC registration code: APE 2829A French VAT: FR 28 971 506 480

Our product factsheets
are available for download
at our website
www.masterk.com

Your contact information